

## Tubes with common screen grid (G2)

### The Problem:

There exist tubes with two tetrode sections (or two pentode sections) where the screen grids of the two sections are connected to a common socket pin.


This causes the following problem in measurement: When one section is measured the other (unmeasured) section also has the full screen grid voltage, but no anode voltage and no grid voltage. Since the cathodes of both sections are emitting electrons, all electrons emitted in the second section are absorbed by the screen grid. The common screen grid is thus overloaded. Then, because an excessive current is detected, the RoeTest shuts down. Any measurement is impossible.

### Solution:

The unmeasured section must be disabled. This is easily achieved by placing a high negative voltage on the control grid (G1) of the unmeasured section, driving that section into cutoff.

### Implementation in RoeTest:

The RoeTest provides a convenient way to do this, since a second negative-voltage source (G3) is available. As an example, refer to the type QQE03-12. This is a double tetrode with common screen grid connection.

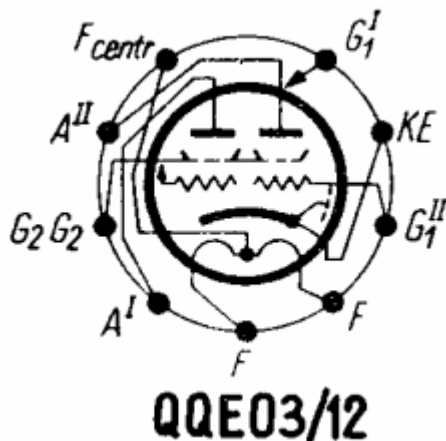

As the socket diagram shows, the screen grids of both sections are connected to pin 7.

To enable the software to apply the G3 voltage to the control grid of the unmeasured section, we must first create a new tube type. I have called it "tetrode-G3". There is also "pentode-G3" for pentodes with a common G2 connection.



RoeTest - Datenbank

Röhrenname: **QQE03-12** K

s. Vergleichsröhre:

System 1 System 2 System 3

Röhren-(System)art: Tetrode-G3 Tetrode-G3 -

typische Werte:	S2 +1	UA / L [V *]	System 1	System 2	System 3
S3 -1	UG1 [V *]	200,0	200,0	0,0	0,0
S4 +2	UG2/An/Stn [V *]	-13,00	-13,00	0,00	0,00
S5 -2	UG3/G4Okt. [V *]	175,0	175,0	0,0	0,0
	UG4/G5 [V *]	-50,0	-50,0	0,0	0,0

= Stützordnung gemäß Röhrenart

IA/L Soll [mA]:	30,00	30,00	0,00
IG2/An Soll [mA]:	8,00	8,00	0,00
S [mA/V]:	3,30	3,30	0,00
μ:	7,5	7,5	0,0
D:	0,0	0,0	0,0
Ri [KOhm]:	0,0	0,0	0,0

\*) bei Hexoden, Heptoden, Oktoden, Nonoden können die Spannungsquellen auch mit anderen Elektroden verbunden sein (z.B. G3,G4,G5) - siehe Zuordnung in der Datenbank "Röhrenart"

Bemerkungen zur Röhre:  Hilfe zu Röhrenart:

= TT24, GU-17, QQV03-10, QQE03/12Y, QQV03/10, QQE03/12, TT24, RS1029, 11E13, 6360, 6360A,  
 V: Doppelte Sendetetrode  
 -G3-Spannung zur Sperre des zweiten Systems

DS\_zurück DS\_yor neuer DS DS\_duplizieren abbrechen OK

In the tube data, the G3 voltage is set to the high negative value of -50V.

As a result, during the measurement, -50V is applied to the control grid of the non-measured section resulting in complete cutoff. Thus thus the other section can be measured as usual with no overcurrent shutdown.